

4553 Shirley Ave.  
 El Monte, CA 91731  
 Office: (240) 734-3351  
 Toll Free: 1-888-807-2704  
 Email: info@harperfloors.com  
 Website: www.harperfloors.com

# HARPER FLOORS


## ESPC Vinyl Plank Flooring

### ESPC Vinyl Plank | \$3.95 / sf | 26.59 sf / bx

9" x 70" x 8mm (6mm ESPC + 2mm IXPE attached), 20 mil Wear Layer, Pre-attached IXPE, Oak Design, Matte Finish, Painted Bevel Edge Type, Embossed in Register (EIR) Texture



Style: Cento

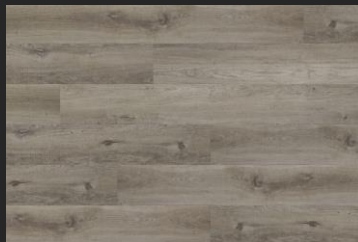

Style: Encanto



Style: Lagos



Style: Porto



Style: Sintra



100%  
Waterproof



Pre-Attached  
Underlayment



Radiant Heat  
Compatible



Embossed  
Surface



Unilin Click  
Lock



Scratch  
Resistant

**Warranty:** Lifetime Residential, 15-year Light Commercial

MOULDINGS	COST
Flush Stair Nose	\$49.50
T-Molding	\$29.50
Reducer	\$29.50
End Cap	\$29.50




## ESPC Vinyl Floors Style: Cento

### Key Features


- 0.5 mm Wear Layer
- Pre-attached IXPE Underlay
- Oak Design
- Matte Finish
- Painted Bevel Edge Type
- Embossed in Register (EIR)




### MATCHED MOLDINGS




Flush Stair Nose  
4.5" x 1" x 94.5"



Reducer  
1.8" x 0.4" x 94.5"



T-Molding  
1.8" x 0.4" x 94.5"



End Cap  
1" x 0.4" x 94.5"

THICKNESS	WIDTH	LENGTH	SF / BX
8mm	9 in	70 in	26.59 sf / bx



100%  
Waterproof



Pre-Attached  
Underlayment



Radiant Heat  
Compatible



Embossed  
Surface



Unilin Click  
Lock



Scratch  
Resistant

**Warranty:** Lifetime Residential, 15-year Light Commercial




## ESPC Vinyl Floors Style: Encanto

### Key Features


- 0.5 mm Wear Layer
- Pre-attached IXPE Underlay
- Oak Design
- Matte Finish
- Painted Bevel Edge Type
- Embossed in Register (EIR)




### MATCHED MOLDINGS




Flush Stair Nose  
4.5" x 1" x 94.5"



Reducer  
1.8" x 0.4" x 94.5"



T-Molding  
1.8" x 0.4" x 94.5"



End Cap  
1" x 0.4" x 94.5"

THICKNESS	WIDTH	LENGTH	SF / BX
8mm	9 in	70 in	26.59 sf / bx



100%  
Waterproof



Pre-Attached  
Underlayment



Radiant Heat  
Compatible



Embossed  
Surface



Unilin Click  
Lock



Scratch  
Resistant

**Warranty:** Lifetime Residential, 15-year Light Commercial






## ESPC Vinyl Floors Style: Lagos

### Key Features


- 0.5 mm Wear Layer
- Pre-attached IXPE Underlay
- Oak Design
- Matte Finish
- Painted Bevel Edge Type
- Embossed in Register (EIR)




### MATCHED MOLDINGS




Flush Stair Nose  
4.5" x 1" x 94.5"



Reducer  
1.8" x 0.4" x 94.5"



T-Molding  
1.8" x 0.4" x 94.5"



End Cap  
1" x 0.4" x 94.5"

THICKNESS	WIDTH	LENGTH	SF / BX
8mm	9 in	70 in	26.59 sf / bx



100%  
Waterproof



Pre-Attached  
Underlayment



Radiant Heat  
Compatible



Embossed  
Surface



Unilin Click  
Lock



Scratch  
Resistant

**Warranty:** Lifetime Residential, 15-year Light Commercial



## ESPC Vinyl Floors Style: Porto

### Key Features


- 0.5 mm Wear Layer
- Pre-attached IXPE Underlay
- Oak Design
- Matte Finish
- Painted Bevel Edge Type
- Embossed in Register (EIR)




CERTIFIED BY  
SCS Global Services




### MATCHED MOLDINGS




Flush Stair Nose  
4.5" x 1" x 94.5"



Reducer  
1.8" x 0.4" x 94.5"



T-Molding  
1.8" x 0.4" x 94.5"



End Cap  
1" x 0.4" x 94.5"

THICKNESS	WIDTH	LENGTH	SF / BX
8mm	9 in	70 in	26.59 sf / bx



100%  
Waterproof



Pre-Attached  
Underlayment



Radiant Heat  
Compatible



Embossed  
Surface



Unilin Click  
Lock



Scratch  
Resistant

**Warranty:** Lifetime Residential, 15-year Light Commercial




## ESPC Vinyl Floors Style: Sintra

### Key Features


- 0.5 mm Wear Layer
- Pre-attached IXPE Underlay
- Oak Design
- Matte Finish
- Painted Bevel Edge Type
- Embossed in Register (EIR)




### MATCHED MOLDINGS




Flush Stair Nose  
4.5" x 1" x 94.5"



Reducer  
1.8" x 0.4" x 94.5"



T-Molding  
1.8" x 0.4" x 94.5"



End Cap  
1" x 0.4" x 94.5"

THICKNESS	WIDTH	LENGTH	SF / BX
8mm	9 in	70 in	26.59 sf / bx



100%  
Waterproof



Pre-Attached  
Underlayment



Radiant Heat  
Compatible



Embossed  
Surface



Unilin Click  
Lock



Scratch  
Resistant

**Warranty:** Lifetime Residential, 15-year Light Commercial