

4553 Shirley Ave
 El Monte, CA 91732
 Office: (240) 734-3351
 Toll Free: 1-888-807-2704
 Email: info@harperfloors.com
 Website: www.harperfloors.com

HARPER FLOORS

SPC Vinyl Plank Flooring

SPC Vinyl Floors | \$3.55 / sf | 23.68 sf / bx

7" x 60" x 6mm (4.5mm SPC + 1.5mm IXPE attached), 0.5mm Wear Layer, Pre-attached IXPE, Oak Design, Matte Finish, Painted Bevel Edge Type, Embossed in Register (EIR) Texture



Style: Anza



Style: Astor



Style: Bellevue




Style: Camden



Style: Folsom



Style: Ludlow

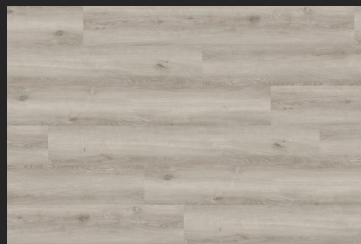

Style: Windsor



100%
Waterproof



Pre-Attached
Underlayment



Radiant Heat
Compatible



Embossed
Surface



Unilin Click
Lock



Scratch
Resistant

Warranty: Lifetime Residential, 15-year Light Commercial

MOULDINGS	COST
Flush Stair Nose	\$49.50
T-Molding	\$29.50
Reducer	\$29.50
End Cap	\$29.50




SPC Vinyl Floors Style: Anza

Key Features


- 0.5 mm Wear Layer
- Pre-attached IXPE Underlay
- Oak Design
- Matte Finish
- Painted Bevel Edge Type
- Embossed in Register (EIR)




MATCHED MOLDINGS




Flush Stair Nose
4.5" x 1" x 94.5"



Reducer
1.8" x 0.4" x 94.5"



T-Molding
1.5" x 0.4" x 94.5"



End Cap
1.4" x 0.4" x 94.5"

THICKNESS	WIDTH	LENGTH	SF / BX
6mm	7 in	60 in	23.68 sf / bx



100%
Waterproof



Pre-Attached
Underlayment



Radiant Heat
Compatible



Embossed
Surface



Unilin Click
Lock



Scratch
Resistant

Warranty: Lifetime Residential, 15-year Light Commercial



SPC Vinyl Floors Style: Astor

Key Features


- 0.5 mm Wear Layer
- Pre-attached IXPE Underlay
- Oak Design
- Matte Finish
- Painted Bevel Edge Type
- Embossed in Register (EIR)




CERTIFIED BY
SCS Global Services




MATCHED MOLDINGS




Flush Stair Nose
4.5" x 1" x 94.5"



Reducer
1.8" x 0.4" x 94.5"



T-Molding
1.5" x 0.4" x 94.5"



End Cap
1.4" x 0.4" x 94.5"

THICKNESS	WIDTH	LENGTH	SF / BX
6mm	7 in	60 in	23.68 sf / bx



100%
Waterproof



Pre-Attached
Underlayment



Radiant Heat
Compatible



Embossed
Surface




Unilin Click
Lock



Scratch
Resistant

Warranty: Lifetime Residential, 15-year Light Commercial

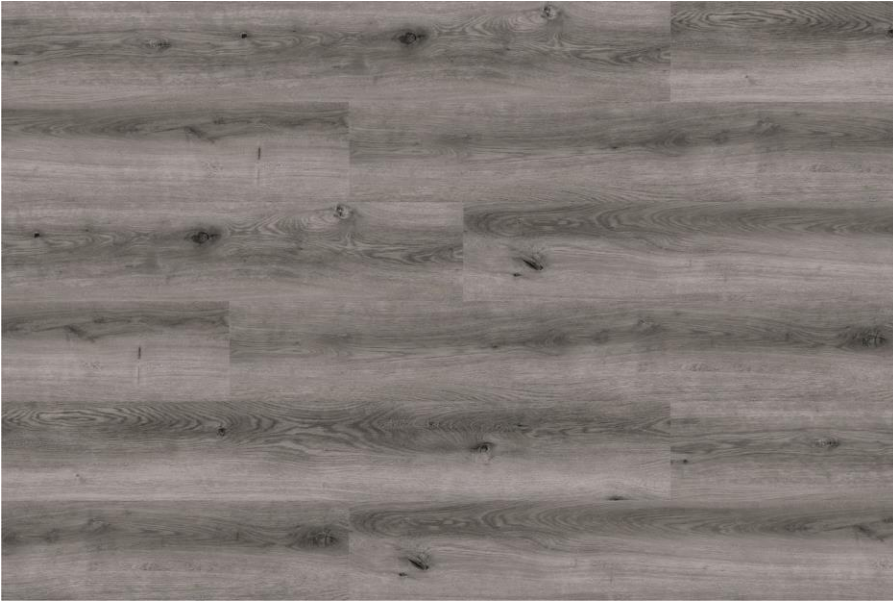


SPC Vinyl Floors Style: Bellevue

Key Features


- 0.5 mm Wear Layer
- Pre-attached IXPE Underlay
- Oak Design
- Matte Finish
- Painted Bevel Edge Type
- Embossed in Register (EIR)




MATCHED MOLDINGS




Flush Stair Nose
4.5" x 1" x 94.5"



Reducer
1.8" x 0.4" x 94.5"



T-Molding
1.5" x 0.4" x 94.5"



End Cap
1.4" x 0.4" x 94.5"

THICKNESS	WIDTH	LENGTH	SF / BX
6mm	7 in	60 in	23.68 sf / bx



100%
Waterproof



Pre-Attached
Underlayment



Radiant Heat
Compatible



Embossed
Surface



Unilin Click
Lock



Scratch
Resistant

Warranty: Lifetime Residential, 15-year Light Commercial




SPC Vinyl Floors Style: Camden

Key Features


- 0.5 mm Wear Layer
- Pre-attached IXPE Underlay
- Oak Design
- Matte Finish
- Painted Bevel Edge Type
- Embossed in Register (EIR)




MATCHED MOLDINGS




Flush Stair Nose
4.5" x 1" x 94.5"



Reducer
1.8" x 0.4" x 94.5"



T-Molding
1.5" x 0.4" x 94.5"



End Cap
1.4" x 0.4" x 94.5"

THICKNESS	WIDTH	LENGTH	SF / BX
6mm	7 in	60 in	23.68 sf / bx



100%
Waterproof



Pre-Attached
Underlayment



Radiant Heat
Compatible



Embossed
Surface



Unilin Click
Lock



Scratch
Resistant

Warranty: Lifetime Residential, 15-year Light Commercial




SPC Vinyl Floors Style: Folsom

Key Features


- 0.5 mm Wear Layer
- Pre-attached IXPE Underlay
- Oak Design
- Matte Finish
- Painted Bevel Edge Type
- Embossed in Register (EIR)




MATCHED MOLDINGS




Flush Stair Nose
4.5" x 1" x 94.5"



Reducer
1.8" x 0.4" x 94.5"



T-Molding
1.5" x 0.4" x 94.5"



End Cap
1.4" x 0.4" x 94.5"

THICKNESS	WIDTH	LENGTH	SF / BX
6mm	7 in	60 in	23.68 sf / bx



100%
Waterproof



Pre-Attached
Underlayment



Radiant Heat
Compatible



Embossed
Surface



Unilin Click
Lock



Scratch
Resistant

Warranty: Lifetime Residential, 15-year Light Commercial




SPC Vinyl Floors Style: Ludlow

Key Features


- 0.5 mm Wear Layer
- Pre-attached IXPE Underlay
- Oak Design
- Matte Finish
- Painted Bevel Edge Type
- Embossed in Register (EIR)




MATCHED MOLDINGS




Flush Stair Nose
4.5" x 1" x 94.5"



Reducer
1.8" x 0.4" x 94.5"



T-Molding
1.5" x 0.4" x 94.5"



End Cap
1.4" x 0.4" x 94.5"

THICKNESS	WIDTH	LENGTH	SF / BX
6mm	7 in	60 in	23.68 sf / bx



100%
Waterproof



Pre-Attached
Underlayment



Radiant Heat
Compatible



Embossed
Surface



Unilin Click
Lock



Scratch
Resistant

Warranty: Lifetime Residential, 15-year Light Commercial




SPC Vinyl Floors Style: Windsor

Key Features


- 0.5 mm Wear Layer
- Pre-attached IXPE Underlay
- Oak Design
- Matte Finish
- Painted Bevel Edge Type
- Embossed in Register (EIR)




MATCHED MOLDINGS




Flush Stair Nose
4.5" x 1" x 94.5"



Reducer
1.8" x 0.4" x 94.5"



T-Molding
1.5" x 0.4" x 94.5"



End Cap
1.4" x 0.4" x 94.5"

THICKNESS	WIDTH	LENGTH	SF / BX
6mm	7 in	60 in	23.68 sf / bx



100%
Waterproof



Pre-Attached
Underlayment



Radiant Heat
Compatible



Embossed
Surface



Unilin Click
Lock



Scratch
Resistant

Warranty: Lifetime Residential, 15-year Light Commercial